

# Shine WIFI Konfiguration


## Bemerkung

**Q1: LED von Wifi-Modul ist aus.**


**A:** Überprüfen Sie, ob der Wechselrichter eingeschaltet ist.  
Einige Modelle (MTL-S / TL3-S) verfügen über einen DIP-Schalter auf der rechten Seite des RS232-Ports. Bitte schalten Sie PIN1 auf „ON“ und halten Sie PIN2 auf „OFF“. Bitte stellen Sie es wie folgt ein:



1. Das Passwort und der Name vom Router dürfen ausschließlich aus Zahlen und Buchstaben bestehen, keine Sonderzeichen und Leerzeichen.
2. Schauen Sie In der Shinephone App, ob es ein Überwachungsgerät gibt? Wenn ja, bitte löschen.

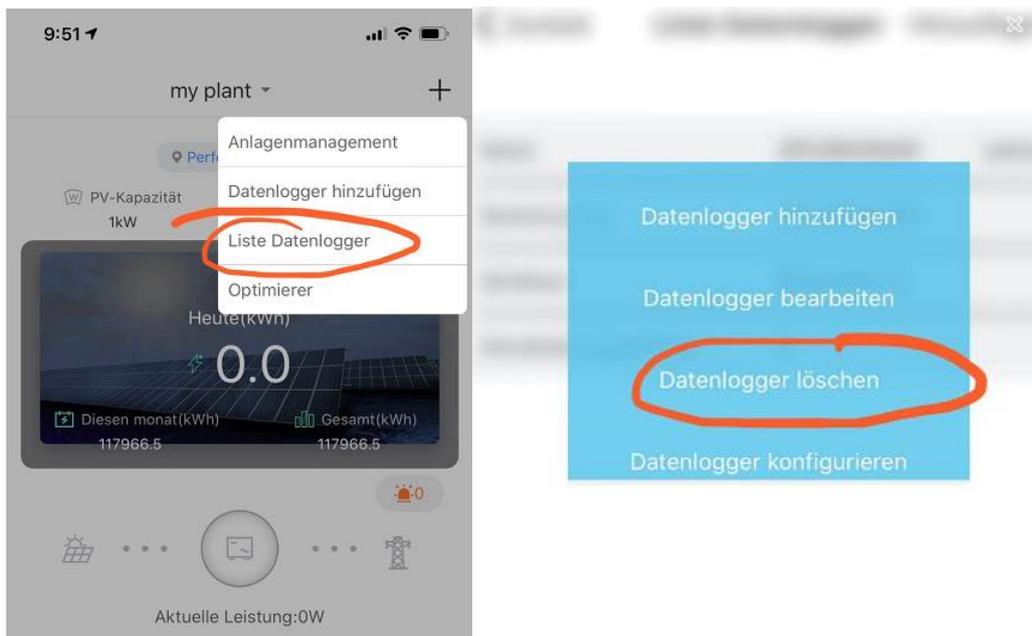

3. ShineWifi reset - Bitte die „key“-Taste 6 Sekunden lang drücken, bis die LED 3-farbig Licht leuchtet.

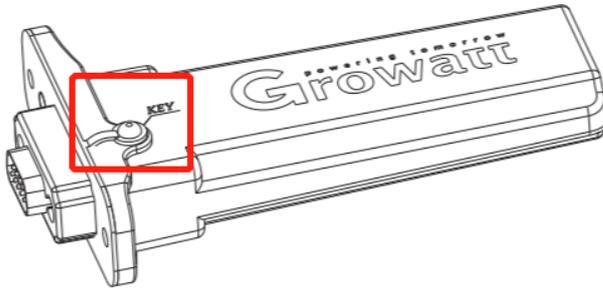

Wenn die LED rot blinkt, dann können Sie ShineWifi-S mit der APP ShinePhone neu konfigurieren.

4. **Bemerkn:** Überwachungsgerät unterstützt nur 2.4GHz.

Bitte wählen Sie Methode 1: 2.4GHz aus.



## Troubleshooting

LED State	Indicate	Troubleshooting
All three LEDs are dark	ShineWiFi-S can not find inverter via RS232 port	1.Check if the DIP switch beside inverters RS232 port is switched DIP1 to "ON" 2.Try to reconnect ShineWifi-S to the inverter RS232 port
After configuration, Only Green LED flashes	ShineWiFi-S already connected to The home router, but not connected To Growatt ShineServer	(1) Check if home router is connected to the internet (2) Check if the router firewall allows to select port 5279 and 5280
After configuration, Only Blue LED flashes	ShineWiFi-S communication OK with inverter, home router, and Growatt ShineServer	Normal working state
Red LED always ON	ShineWiFi -S module error	Need to replace with a new ShineWiFi-S
Green LED always ON	ShineWiFi-S can't connect to the home router	(1) Check router information a) Router name should consist of English letters and numbers, it does not support special symbols b) For safety reason, please use encrypted wireless network c) It does not support public network that use secondary authentication (2) Check if you filled in the correct name and password of the home router when configuring it
Blue LED always ON	ShineWiFi-S module is in AP mode	Debug mode, short press the KEY button to quit